

Backflow Preventer Enclosures

- Quality 304 Stainless Steel for superior corrosion resistance
- Lockable Front Cover with Perspex Viewing Window
- Adjustable Depth Door Frame
- Wall Recessed, Side Entry Threaded Connections
- 40mm Waste Connection
- Fully Assembled Valves
- Suitable for valves sizes: DN 15 - 25
- Max.Temp 90°C
- Max.Pressure 1400 kPa
- Available in single and double device models.




SINGLE DEVICES - 500 (H) x 600 (W) x 90 (D)

SSDCABPX-009-015S	15mm
SSDCABPX-009-020S	20mm
SSDCABPX-009-025S	25mm

DOUBLE DEVICES - 600 (H) x 630 (W) x 90 (D)

SSDCABPX-009-015D	15mm
SSDCABPX-009-020D	20mm
SSDCABPX-009-025D	25mm

Other configurations available on request.

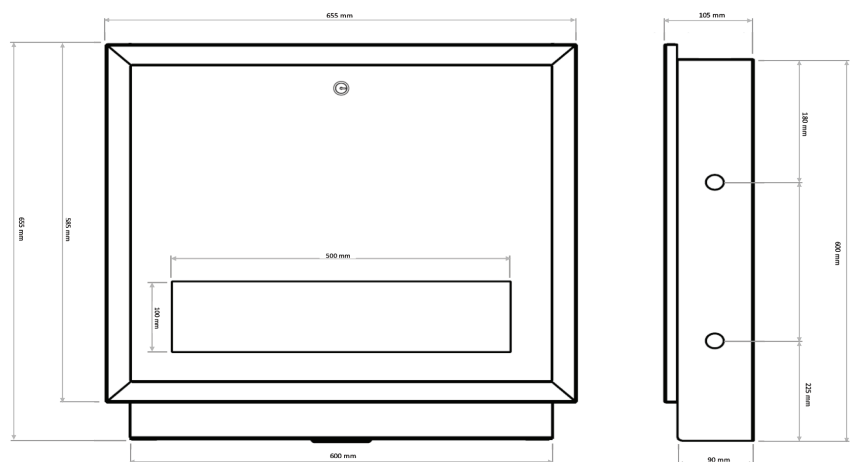

Double device model shown