

# Stainless Steel Flexible Coupling

## Style 77S



8 – 18"/200 – 450mm

### 1.0 PRODUCT DESCRIPTION

#### Available Sizes

- 8 – 18"/200 – 450 mm

#### Maximum Working Pressure

- Up to 300 psi/2068 kPa
- Working pressure dependent on material, wall thickness and size of pipe.

#### Application

- Joins standard roll or cut grooved pipe and standard grooved-end fittings, valves and accessories.

#### Pipe Materials

- Stainless Steel pipe

#### Codes and Requirements

- Support hanger spacing correspond to ASME B31.1 Power Piping code and ASME B31.9 Building Services Piping Code.

#### NOTE

- For sizes ¾ – 6"/20 – 150 mm duplex and/or stainless steel flexible couplings, please see [publication 17.20](#) for the Style 77DX Duplex Stainless Steel Flexible Coupling.

### 2.0 CERTIFICATION/LISTINGS

#### NOTES

- See Victaulic [Publication 02.06](#) for potable water approvals if applicable.

ALWAYS REFER TO ANY NOTIFICATIONS AT THE END OF THIS DOCUMENT REGARDING PRODUCT INSTALLATION, MAINTENANCE OR SUPPORT.

System No.		Location	
Submitted By		Date	

Spec Section		Paragraph	
Approved		Date	

### 3.0 SPECIFICATIONS – MATERIAL

**Gasket: (specify choice<sup>1</sup>)****Grade “EW” EPDM**

EPDM (Green W color code). Temperature range –30°F to +230°F/–34°C to +110°C. May be specified for hot water service within the specified temperature range plus a variety of dilute acids, oil-free air and many chemical services. WRAS-certified material with approved microbiological resistance to BS 6920 for cold and hot potable water service up to +149°F/+65°C. UL Classified in accordance with ANSI/NSF 61 for cold +73°F/+23°C and hot +180°F/+82°C potable water service and ANSI/NSF 372. NOT COMPATIBLE FOR PETROLEUM SERVICES. Note: Grade “EW” gaskets are available 8 – 12”/200 – 300mm sizes only.

**Grade “T” Nitrile**

Nitrile (Orange stripe color code). Temperature range –20°F to +180°F/–29°C to +82°C. May be specified for petroleum products, air with oil vapors, vegetable and mineral oils within the specified temperature range. Not compatible for hot water services over +150°F/+66°C or for hot dry air over +140°F/+60°C.

**Grade “O” Fluoroelastomer**

Fluoroelastomer (Blue stripe color code). Temperature range +20°F to +300°F/–7°C to +149°C. Compatible for many oxidizing acids, petroleum oils, halogenated hydrocarbons, lubricants, hydraulic fluids, organic liquids and air with hydrocarbons.

**Grade “A” White Nitrile**

White nitrile (White gasket). Temperature range +20°F to +180°F/–7°C to +82°C. No carbon black content. May be used for food services. Meets FDA requirements and conforms to CFR Title 21 Part 177.2600.

**Others**

For alternate gasket selection, refer to Victaulic [submittal publication 05.01](#).

<sup>1</sup> Services listed are General Service Guidelines only. It should be noted that there are services for which these gaskets are not compatible. Reference should always be made to the latest [Victaulic Gasket Selection Guide](#) for specific gasket service guidelines and for a listing of services which are not compatible.

**Bolts/Nuts:<sup>2</sup>**

Standard:


Bolts – Stainless steel, meeting the mechanical property requirements of ASTM F593, Group 2 (316 stainless steel), condition CW.

Nuts – Stainless Steel meeting the mechanical property requirements of ASTM F594, Group 2 (316 stainless steel), condition CW, with galling reducing coating.

<sup>2</sup> Optional bolts/nuts are available in imperial size only.

## 4.0 DIMENSIONS

### Style 77S

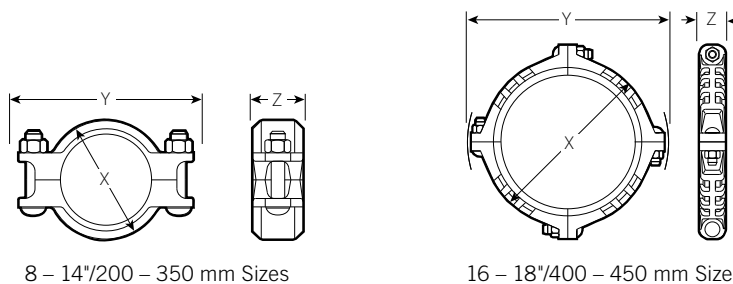

Size		Pipe End Separation <sup>3</sup>	Deflection from Centerline		Bolt/Nut <sup>4</sup>		Dimensions			Weight
Nominal inches DN	Actual Outside Diameter inches mm	Allowable inches mm	Per Coupling Degrees	pipe In/Ft. mm/m	Qty.	Size inches	X inches mm	Y inches mm	Z inches mm	Approximate (Each) lb kg
<sup>3</sup> / <sub>4</sub> – 6 DN20 – DN150										
For <sup>3</sup> / <sub>4</sub> – 6\"/>										
8 DN200	8.625 219.1	0 – 0.13 0 – 3.2	0° – 50'	0.18 14	2	<sup>7</sup> / <sub>8</sub> x 5	11.38 229	14.74 374	2.44 62	23.5 10.7
10 DN250	10.750 273.0	0 – 0.13 0 – 3.2	0° – 40'	0.14 12	2	1 x 6	13.50 343	17.33 440	2.63 67	33.0 15.0
12 DN300	12.750 323.9	0 – 0.13 0 – 3.2	0° – 34'	0.12 9	2	1 x 6 ½	15.50 394	19.15 486	2.56 65	35.0 15.9
14 DN350	14.000 355.6	0 – 0.13 0 – 3.2	0° – 31'	0.11 9	2	1 x 6 ½	16.56 421	20.44 519	2.81 71	37.0 16.8
16 DN400	16.000 406.4	0 – 0.13 0 – 3.2	0° – 27'	0.10 9	4	1 x 5 ½	18.94 481	22.52 572	2.94 75	53.0 24.0
18 DN450	18.000 457.0	0 – 0.13 0 – 3.2	0° – 24'	0.08 7	4	1 x 5 ½	21.25 540	24.62 625	3.06 78	62.0 25.0

<sup>3</sup> Allowable Pipe End Separation and Deflection figures show the maximum nominal range of movement available at each joint for standard roll grooved pipe. Figures for standard cut grooved pipe may be doubled. These figures are maximums; for design and installation purposes these figures should be reduced by: 50% for <sup>3</sup>/<sub>4</sub> – 3 ½\"/>

<sup>4</sup> Number of bolts required equals number of housing segments.

## 5.0 PERFORMANCE

### Performance on ANSI Wall Thicknesses:

Nominal Size inches DN	Actual Outside Diameter inches mm	Pipe Wall Thickness		Groove Type	Maximum	
		inches mm	ANSI Schedule Number		Working Pressure psi kPa	End Load lb N
8 DN200	8.625 219.1	0.323 8.2	40S	Std/C	300 2068	17524 77951
		0.150 3.8	10S	RX	125 862	7305 32492
		0.110 2.8	5S	RX	75 517	4381 19488
10 DN250	10.750 273.0	0.366 9.3	40S	Std/C	300 2068	27223 121094
		1.165 4.2	10S	RX	125 862	11347 50475
		0.134 3.4	5S	RX	75 517	6806 30274
12 DN300	12.750 323.9	0.375 9.5	40S	Std/C	300 2068	38295 170344
		0.181 4.6	10S	RX	125 862	15962 71004
		0.156 4.0	5S	RX	75 517	9574 42586
14 DN350	14.000 355.6	0.375 9.5	40S	C	200 1379	30800 137060
		0.188 4.8	10S	RX	100 689	15400 68530
		0.156 4.0	5S	RX	65 448	10000 44500
16 DN400	16.000 406.4	0.375 9.5	40S	C	125 862	25130 111829
		0.188 4.8	10S	RX	45 276	9050 40273
		0.165 4.2	5S	RX	35 241	7040 31328
18 DN450	18.000 457.0	0.375 9.5	40S	C	100 689	25450 113253
		0.188 4.8	10S	RX	40 345	10180 45301
		0.165 4.2	5S	RX	30 207	7635 33976

RX= Roll Set for light wall stainless steel pipe marked with the prefix "RX"

Std= Standard roll set marked with the prefix "R"

C= Cut groove

#### NOTE

- WARNING: FOR ONE TIME FIELD TEST ONLY, the Maximum Joint Working Pressure may be increased to 1½ times the figures shown.
- Metric thread size bolts are available for all coupling sizes upon request. Contact Victaulic for details.
- WARNING: Depressurize and drain the piping system before attempting to install, remove, or adjust any Victaulic piping products.

## 5.1 PERFORMANCE

### Performance on ISO Wall Thicknesses:

Nominal Size mm DN	Actual Outside Diameter mm inches	Pipe Wall Thickness mm inches	Groove Type	Maximum	
				Working Pressure kPa psi	End Load N lb
DN200 8	219.1 8.625	12.5 0.492	C	2068 300	77951 17524
		8.0 0.315	Std/C	2068 300	77968 17528
		6.5 0.256	Std/C	1600 232	60295 13555
		6.3 0.248	Std/C	1600 232	60311 13558
		5.0 0.197	Std	1207 175	45481 10225
		4.0 0.157	Std	862 125	32486 7303
		3.6 0.142	RX	689 100	25989 5843
		3.2 0.126	RX	689 100	25989 5843
		3.0 0.118	RX	517 75	19492 4382
DN250 10	273.0 10.750	14.2 0.559	C	2068 300	121094 27223
		12.5 0.492	C	2068 300	121094 27223
		10.0 0.394	C	2068 300	121094 27223
		6.3 0.248	Std/C	1379 200	80746 18153
		4.0 0.157	RX	689 100	40373 9076
		3.6 0.142	RX	517 75	30280 6807
DN300 12	323.9 12.750	12.5 0.492	C	2068 300	170344 38295
		10.0 0.394	C	2068 300	170344 38295
		7.1 0.280	Std/C	862 125	113586 25535
		5.0 0.197	RX	517 75	70991 15960
		4.5 0.177	RX	517 75	70991 15960
		4.0 0.157	RX	517 75	42586 9574

RX= Roll Set for light wall stainless steel pipe marked with the prefix "RX"

Std= Standard roll set marked with the prefix "R"

C= Cut groove

#### NOTE

- For pressure ratings on wall thicknesses not mentioned please contact Victaulic.

## 6.0 NOTIFICATIONS

### WARNING

- Victaulic RX roll sets must be used when grooving light-wall/thin-wall stainless steel pipe for use with Victaulic Couplings.

Failure to use Victaulic RX roll sets when grooving light-wall/thin-wall stainless steel pipe may cause joint failure, resulting in serious personal injury and/or property damage.

### NOTICE

- Victaulic RX grooving rolls must be ordered separately. They are identified by a silver color and the designation RX on the front of the roll sets.

## 7.0 REFERENCE MATERIALS

[02.06: Potable Water Approvals](#)

[05.01: Seal Selection Guide](#)

[I-100: Field Installation Handbook](#)

### User Responsibility for Product Selection and Suitability

Each user bears final responsibility for making a determination as to the suitability of Victaulic products for a particular end-use application, in accordance with industry standards and project specifications, and the applicable building codes and related regulations as well as Victaulic performance, maintenance, safety, and warning instructions. Nothing in this or any other document, nor any verbal recommendation, advice, or opinion from any Victaulic employee, shall be deemed to alter, vary, supersede, or waive any provision of Victaulic Company's standard conditions of sale, installation guide, or this disclaimer.

### Intellectual Property Rights

No statement contained herein concerning a possible or suggested use of any material, product, service, or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Victaulic or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product, service, or design in the infringement of any patent or other intellectual property right. The terms "Patented" or "Patent Pending" refer to design or utility patents or patent applications for articles and/or methods of use in the United States and/or other countries.

### Note

This product shall be manufactured by Victaulic or to Victaulic specifications. All products to be installed in accordance with current Victaulic installation/assembly instructions. Victaulic reserves the right to change product specifications, designs and standard equipment without notice and without incurring obligations.

### Installation

Reference should always be made to the Victaulic installation handbook or installation instructions of the product you are installing. Handbooks are included with each shipment of Victaulic products, providing complete installation and assembly data, and are available in PDF format on our website at [www.victaulic.com](http://www.victaulic.com).

### Warranty

Refer to the Warranty section of the current Price List or contact Victaulic for details.

### Trademarks

*Victaulic* and all other Victaulic marks are the trademarks or registered trademarks of Victaulic Company, and/or its affiliated entities, in the U.S. and/or other countries.