

New standard flexible Connectors to AS/NZS3499-2022



Lead Free Flexible Connectors for General Hot and Cold Water applications

Features

316 Stainless Steel braided tube

Non Corrosive and UV complaint to the new standard

Available in straight and elbow versions

Lead free

Durable PEX inner tube with 8mm bore

Suitable for hot water up to 70 degree's

Triple Crimped

Maximum Operarating Pressure 1400kpa



For more information on this product scan the QR code or visit www.hydroflowaus.com.au



Standard: AS/NZS3499
Watermark License: WM-032132



WM032132
AS/NZS3499-2022 (L)



1300 493 359
www.hydroflowaus.com.au
sales@hydroflowaus.com.au

INSTALLATION INSTRUCTION

Clean all connecting threads.
Connect flexible hose.
Tighten till seal and then make half a turn with
spanner.
Check for no leaks.

Suitable for hot water up to 70 degrees
Stainless steel hose can be installed external to
exposed sunlight (UV).
Black Nylon hose not suitable for exposed
sunlight (UV).
Can NOT be installed in submersible water.

10-Year WARRANTY (Stainless steel hose)



5-Year WARRANTY (Black Nylon hose)

This product is covered under warranty on faulty
workmanship and materials by manufacturing.

The license plumber is responsible for installation
and the application is fit for propose.

No claim will be approved where the product has
been Incorrectly installed, twisted, kinks, over
stretched, over tightened. Exposure to highly
corrosive agents.

All claims must be notified within 2 working days.
All claims hoses must be sent back to distributor
for laboratory appraisal.

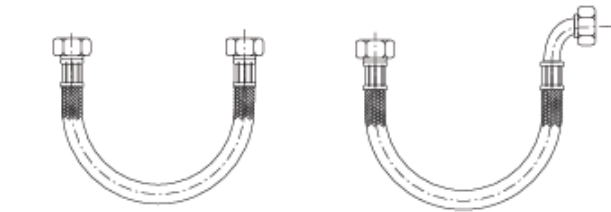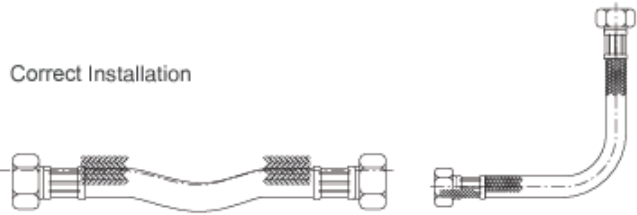

Incorrect Installation

