

HYDROFLOW

DISTRIBUTORS (AUST) PTY LTD

Stainless Steel Braided Connectors

Size: 8mm PEX Tube, 15mm Threaded Connections

Flexible Connectors for General Hot and Cold Water applications

Features

- Stainless Steel braided tube
- PEX tubing
- Available in straight and elbow versions
- 10 year warranty



Pressure - Temperature

- Working Pressure: 1750kpa
- Temperature Range: 5°C ~90°C

Option/Type

- Standard: Fittings: 15mm FEMALE x 15mm FEMALE
Length: 150mm to 1500mm
- Elbow: Fittings: 15mm FEMALE x 15mm FEMALE ELBOW
Length: 150mm to 600mm
- Options: Fittings: 15mm FEMALE x 15mm MALE
Length: 150mm/250mm

Approval
Standard: AS/NZS3499
Watermark License: WM-022703

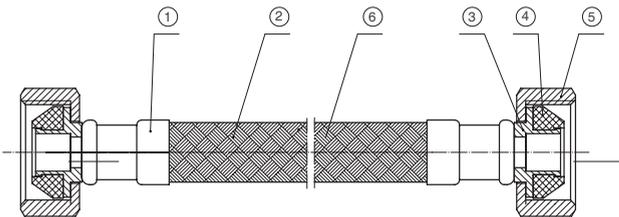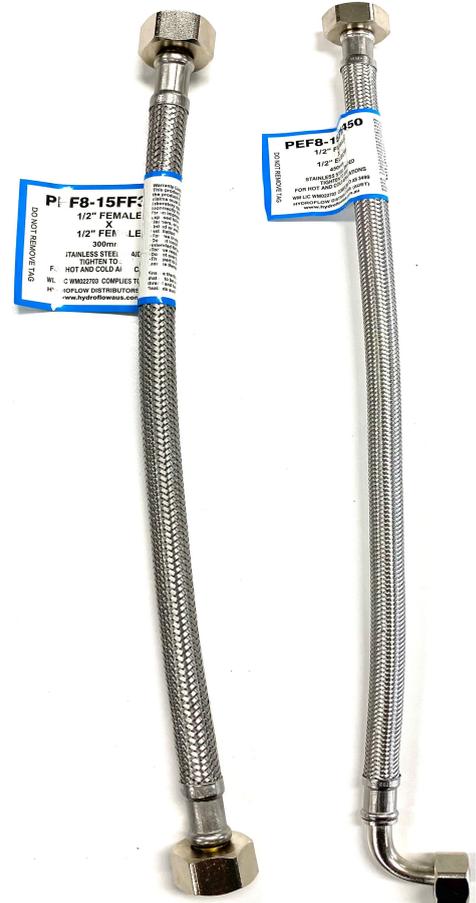


Material

NO.	Component	Material
1	Sleeve	SS 304
2	Braiding	SS 304
3	Barb	Brass
4	Washer	EPDM
5	Hexagon Nut	Brass
6	Tube	PEX


Installation Instruction

- This product should be installed by a licensed plumber
- Connectors are designed for applications above ground, not submerged, and with easy access
- It is the responsibility of the installer to ensure the suitability of the connector for the application
- This product is only to be used on potable or Class A recycled water
- Do not twist, stretch or excessively bend, and the connector should be free from other objects
- Prior to installing ensure that all threads are clean and that the seals are undamaged
- After installation ensure that there are no leaks after installation
- Refer to the connector product label for additional correct installation methods and detail

Correct Installation

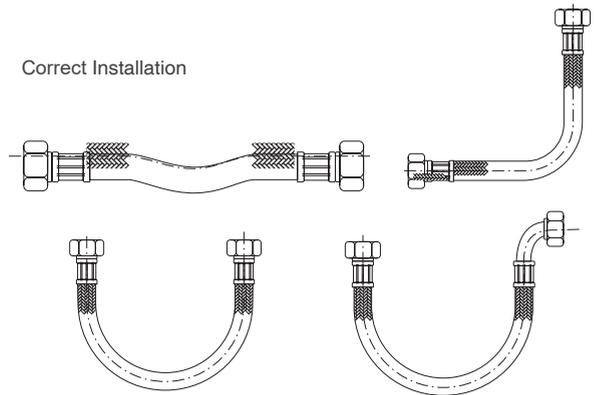

Incorrect Installation

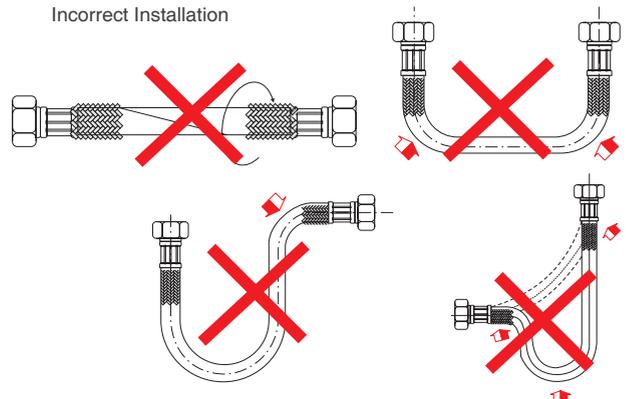

Hydroflow Distributors (Aust) Pty Ltd

24 Harcourt Road, Altona, VIC, 3018. Ph 1300 493 359 F: +613 9676 9268