


316L Stainless Steel WELD ON Butterfly



The 316L Stainless Steel Weld on Butterfly Valve is a sanitary-grade valve with a polished finish and tri-clamp ends, offering easy cleaning and reliable shut-off for food, beverage, pharmaceutical applications and HVAC


Key Features

- **Material:** 316L Stainless Steel (Body & Disc)
- **Connection:** Weld on
- **Size Range:** DN10 – DN200
- **Finish:** Polished internal and external surfaces
- **Seals:** EPDM Peroxide cured
- **Pressure Rating:** Up to 10 bar
- **Temperature Range:** -20°C to +135°C (EPDM)
- **Operation:** Manual handle with two step opening action

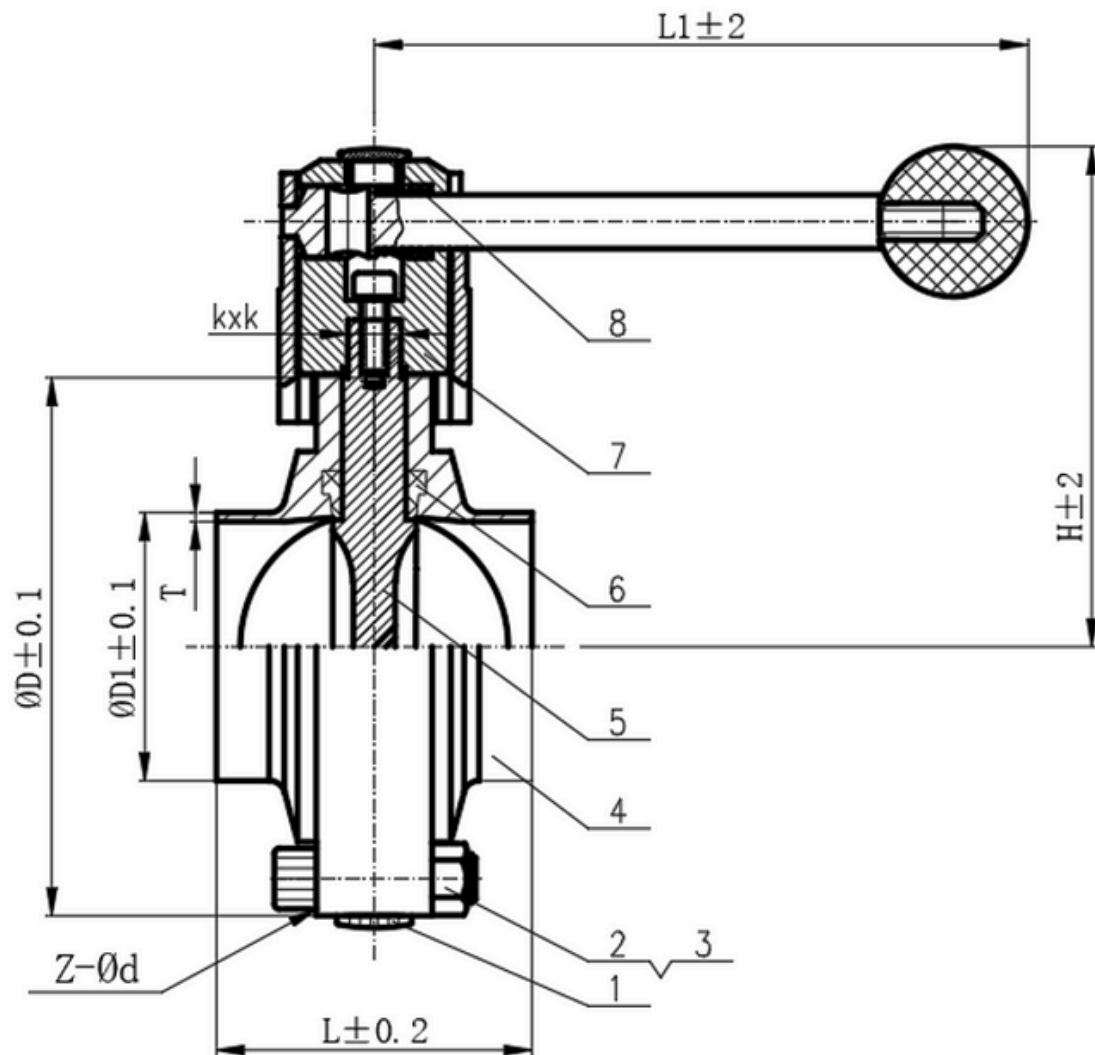

No.	Part Code	Part Name	Material	Qty
9	ST-P02	Dust Cap	PE	1
8	ST-SB01	Pull Handle	304	1
7	ST-P03	Seal	EPDM	1
6	ST-D01	Disc	316L	1
5	ST-VC	Body	316L	2
4	DIN003	External Hex Nut	304	4/6
3	DIN002	Washer	304	4/6
2	DIN001	Internal Hex Bolt	304	4/6
1	ST-P01	Dust Cap	PE	0/1

Pressure Drop Graph

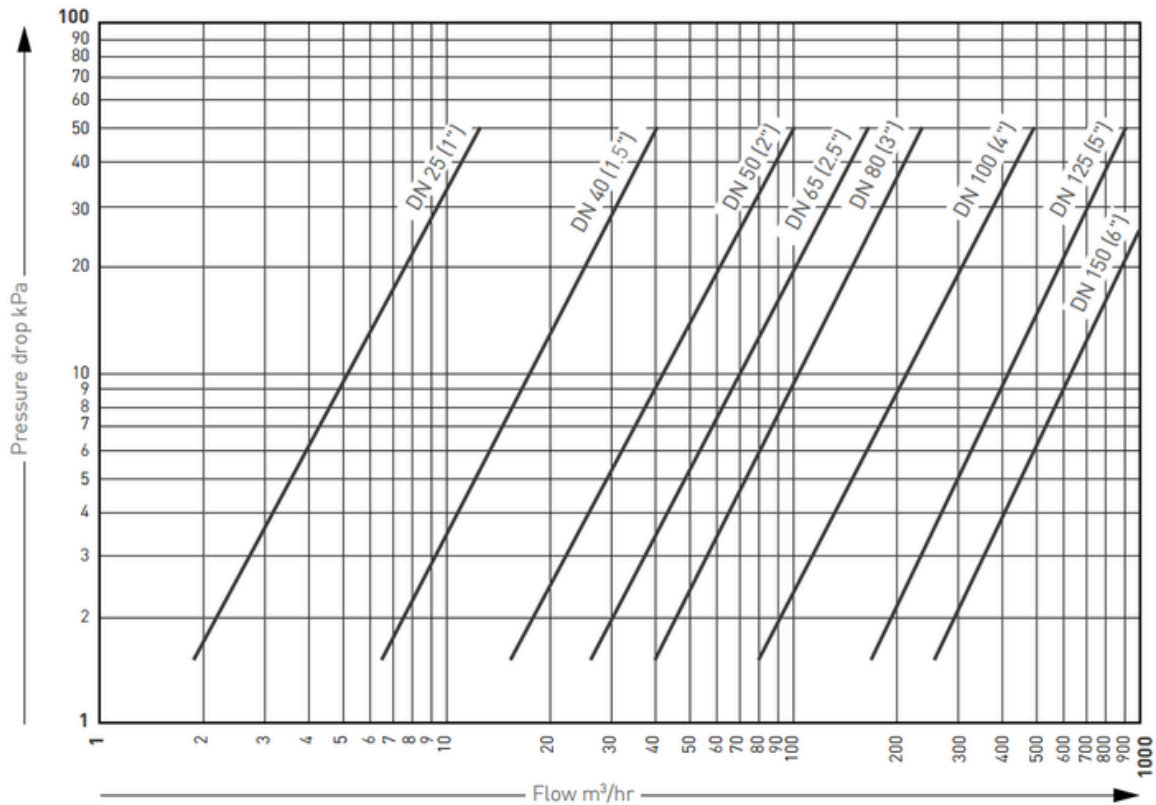

Dimensions Graph

Size	L	Φ D	Φ D1	H	L1	KxK	T	Z-Φd
DN10	50	78	13	82	150	8x8	1.5	4-Φ6.5
DN15	50	78	19	82	150	8x8	1.5	4-Φ6.5
DN20	50	78	23	82	150	8x8	1.5	4-Φ6.5
DN25	50	78	29	82	150	8x8	1.5	4-Φ6.5
DN32	50	84	35	86	150	8x8	1.5	4-Φ6.5
DN40	50	90	41	88	150	8x8	1.5	4-Φ6.5
DN50	52	106	53	96	150	10x10	1.5	4-Φ8.5
DN65	56	120	70	114.5	160	10x10	1.5	4-Φ8.5
DN80	60	139	85	122	180	11x11	2	4-Φ8.5
DN100	64	159	104	132	180	11x11	2	4-Φ8.5
DN125	80	189	129	153.5	200	14x14	2	6-Φ8.5
DN150	90	215	154	168.5	250	14x14	2	6-Φ8.5
DN200	90	285	204	204	300	14x14	2	6-Φ8.5